


Data Sheet
High Precision Ball Bearings



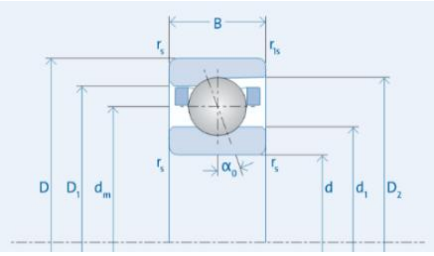

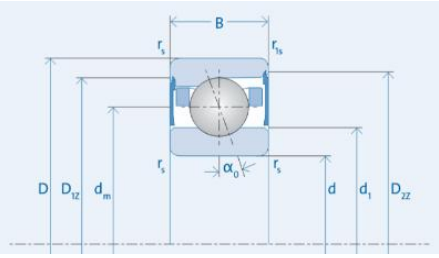

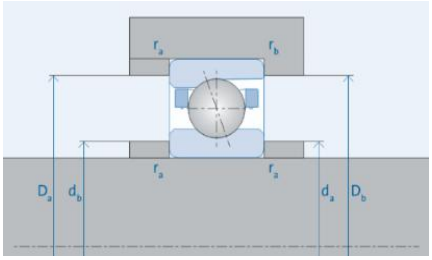

Part Number	**HY SM 61914 C TA**
Bearing Size	61914

Bearing Series	SM
Ball Material	Silicon Nitride (Si3N4)
Ring Material	100 Cr 6 (SAE 52100)

Bearing Dimensions

Bore Diameter	d [mm]	70
Outer Diameter	D [mm]	100
Bearing Width	B [mm]	16
Pitch Circle Diameter	d_m [mm]	85.0
Ball Diameter	D_w [mm]	7.938
OD Inner Ring	d_1 [mm]	80.1
ID Outer Ring	D_1 [mm]	89.9
ID Outer Ring (Open Side)	D_2 [mm]	93.0
ID Outer Ring of Contact Surface	D_{1Z} [mm]	
ID Outer Ring (Open Side) of Contact Surface	D_{2Z} [mm]	
Chamfer	r_s [mm]	1.0
Chamfer (Open Side)	r_{1s} [mm]	0.3

Geometrical Data

Number of Balls	Z [Qty.]	24
Contact Angle	α_0 [°]	19
Bearing Weight	m [kg]	0.305

Mating Part Dimensions

Abutment Diameter Inner Ring	$d_{a,b}$ min. [mm]	75.2
Abutment Diameter Outer Ring	D_a max. [mm]	95.4
Abutment Diameter Outer Ring	D_b max. [mm]	96.7
Chamfer Associated Component	r_a max. [mm]	1.0
Chamfer Associated Component (Open Side)	r_b max. [mm]	0.3
Oil Nozzle Position	d_T [mm]	82.6

Bearing Load Ratings

Dynamic Radial Load Rating	C_r [N]	17,300
Static Radial Load Rating	C_{0r} [N]	12,600
Fatigue Load Limit	C_{ur} [N]	475.0

Bearing Preload Data

Light Pre-Load	F_v L [N]	90
Light Axial Rigidity	C_{ax} L [N/µm]	78
Medium Pre-Load	F_v M [N]	260
Medium Axial Rigidity	C_{ax} M [N/µm]	115
Heavy Pre-Load	F_v S [N]	530
Heavy Axial Rigidity	C_{ax} S [N/µm]	152
Minimum Spring Pre-Load	F_f [N]	670

Bearing RPM Ratings

Speed Value with Oil Lubrication	n_{oil} [1/min]	29,500
Speed Value with Grease Lubrication	n_{grease} [1/min]	22,000

Notes:

1. Position of the oiling Nozzle (d_T) for bearings with TXM cage design upon request
2. The stated load and speed values are given for a spring preloaded single bearing with oil/air or oil mist lubrication. If specific applications differ, please consult correction factors and/or GMN Bearing USA engineers.

GMN Bearing USA
22935 Elkana Deane Lane
Katy, Texas 77449

800-323-5725
www.gmnbt.com